

65 W **Constant Current** LED driver

Product code: 5826

65 W 220 – 240 V 0 / 50 – 60 Hz

- Very high efficiency up to 94%
- Very low current ripple, complying with IEEE 1789 recommendation
- Suitable for use in emergency lighting applications
- Long lifetime up to 100 000 h
- Maximum output voltage limited to 250 V
- Driver protection Class I
- Ideal solution for Class I luminaires, suitable for Class II luminaires too*



* See page 4 for details.

Functional Description

- Adjustable constant current output: 200 mA (default) / 250 mA / 300 mA / 350 mA / 400 mA / 450 mA
- Current setting via DIP switch
- 280 mm length casing for great thermal performance

Mains Characteristics

Nominal rated voltage range	220 V – 240 V, 0 / 50 – 60 Hz
AC voltage range	198 VAC – 264 VAC
	Withstands max. 320 VAC (max. 1 hour)
	Withstands min. 176 VAC (max. 1 hour)
DC voltage range	176 VDC – 280 VDC
DC starting voltage	> 190 VDC
Mains current at full load	0.29 – 0.32 A
Frequency	0 / 50 Hz – 60 Hz
THD at full power	< 10 %
Leakage current to earth	< 0.3 mA
Tested surge protection	1 kV L-N (IEC 61000-4-5) 2 kV L/N-GND (IEC 61000-4-5)
Tested fast transient protection	2 kV (IEC 61000-4-4)

Insulation between circuits & driver case

Mains circuit - Output	Non-isolated
Mains and output - Driver case	Basic insulation


Load Output (non-isolated)

Output current (I_{out})	200 mA / 250 mA / 300 mA / 350 mA / 400 mA / 450 mA
Accuracy	± 5 %
Ripple	< 1 % ¹⁾ at ≤ 120 Hz
	1) Low frequency, LED load: Cree MX3 LEDs
PstLM	≤ 1 ²⁾
SVM	≤ 0.4 ²⁾
	2) At full power, LED load: Cree MX3 LEDs
U_{OUT} (max) (abnormal)	250 V
EOF _I (EL use)	> 0.98 x output current with AC supply

I_{LED}	200 mA (default)	250 mA	300 mA	350 mA	400 mA	450 mA
P_{Rated}	14 W...44 W	17.5 W...55 W	21 W...65.1 W	22.8 W...65.1 W	22.4 W...65.2 W	22.5 W...65.3 W
U_{LED}	70 – 220 V	70 – 220 V	70 – 217 V	65 – 186 V	56 – 163 V	50 – 145 V
PF (λ) at full load	0.98	0.98	0.98	0.98	0.98	0.98
Efficiency (η) at full load	94 %	94 %	94 %	94 %	93 %	93 %


Please note that the product label before revision C has more narrow operation voltage window and lower t_c max rating. However, please refer to the official datasheet specifications in this document with all product revisions in the use and design-in process of the product.

Operating window

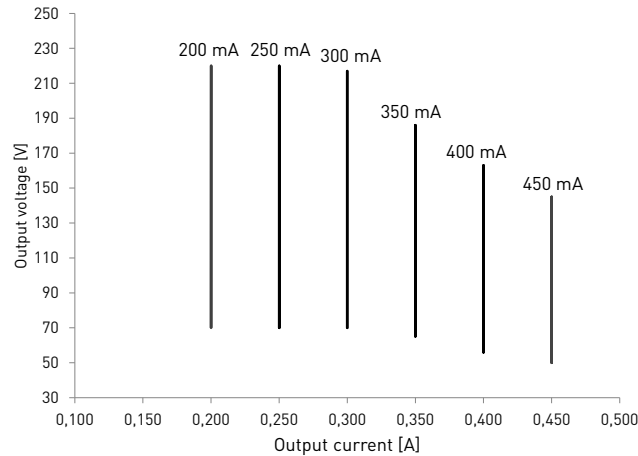


Driver performance

Typical efficiency

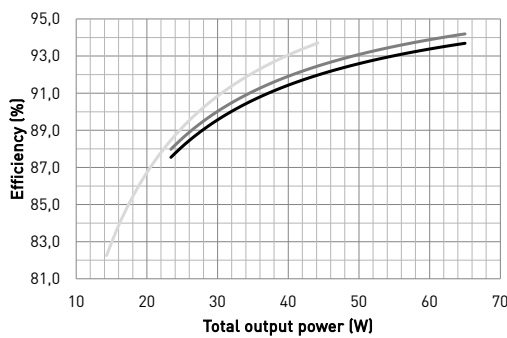

Typical power factor

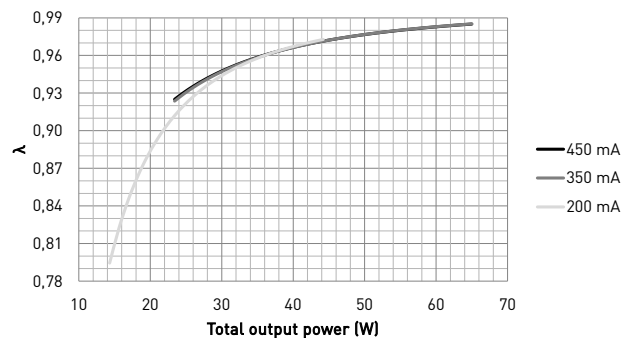

Operating Conditions and Characteristics

Highest allowed t_c point temperature	80 °C
T_c life (50 000 h) temperature	78 °C
Ambient temperature range*	-25 °C ... +50 °C*
Storage temperature range	-40 °C ... +80 °C
Maximum relative humidity	No condensation
Mains switching cycles	> 100 000 cycles
Lifetime (90 % survival rate)	100 000 h, at $t_c = 65$ °C 70 000 h, at $t_c = 70$ °C 50 000 h, at $t_c = 78$ °C 35 000 h, at $t_c = 80$ °C


*) For other than independent use, higher t_s of the controlgear possible as long as highest allowed t_c point temperature is not exceeded

Quantity of drivers per miniature circuit breaker 16 A Type C

Based on inrush current I_{peak}	Typ. peak inrush current I_{peak}	1/2 value time, Δt	Calculated energy, $I_{peak}^2 \Delta t$
48 pcs.	33 A	162 μ s	0.128 A ² s

CONVERSION TABLE FOR OTHER TYPES OF MINIATURE CIRCUIT BREAKER

MCB type	Relative quantity of LED drivers
B 10 A	37 %
B 16 A	60 %
B 20 A	75 %
C 10 A	62 %
C 16 A	100 % (see table above)
C 20 A	125 %

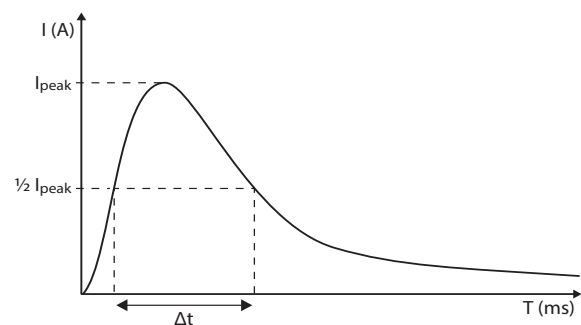

CONTINUOUS CURRENT

Total continuous current of the drivers and installation environment must always be considered and taken into calculations when installing drivers behind miniature circuit breaker. Example calculation of total drivers amount limited by continuous current: $I_{cont} = (16 A (I_{nom, Ta} / \text{"nominal mains current with full load"}) \times 0.76)$. This calculation is an example according to recommended precautions due to multiple adjacent circuit breakers (> 9 MCBs) and installation environment (T_a 30 degrees); variables may vary according to the use case. Both inrush current and continuous current calculations are based on ABB S200 series circuit breakers. More specific information in ABB series S200 circuit breaker documentation.

NOTE! Type C MCB's are strongly recommended to use with LED lighting. Please see more details in "MCB information" document in each driver product page in "downloads & links" section.

Connections and Mechanical Data


Wire size	0.5 mm ² – 1.5 mm ²
Wire type	Solid core and fine-stranded
Wire insulation	According to EN 60598
Maximum driver to LED wire length	1.5 m
Weight	187 g
IP rating	IP20

Connections



Please note that the product label before revision C has more narrow operation voltage window and lower t_c max rating. However, please refer to the official datasheet specifications in this document with all product revisions in the use and design-in process of the product.

Dimensions (mm)

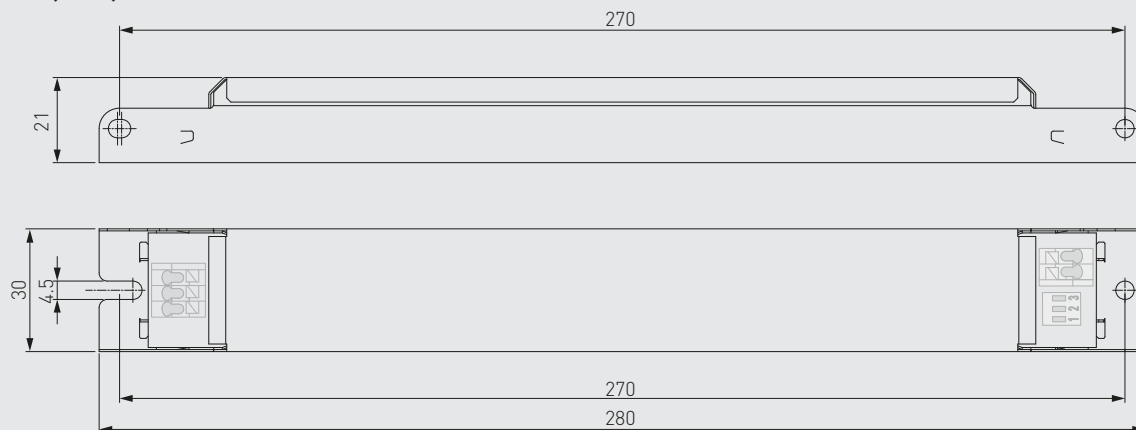

In LL65HE-CC-200-450-DS the current can be set with DIP switches. With each combination of switch setup, a different output current value can be set. The maximum value can be reached with the DIP switch setting "11" (switches pushed towards the input connector) and minimum with setting "00" (pushed away from the input connector, see connections picture above). The output current values according to the DIP switch settings are presented below.

DIP switch combinations, output currents and voltage ranges (Nominal I_{out} ($\pm 5\%$ tol.))

DIP switch combination	000	100	010	110	011	111
I_{out} (mA)	200	250	300	350	400	450
Voltage range	70 – 220 V	70 – 220 V	70 – 217 V	65 – 186 V	56 – 163 V	50 – 145 V

LL65HE-CC-200-450-DS LED driver is suited for built-in usage in luminaires. With LL1x2130-SR strain reliefs, independent use is possible too (see the LL1x2130-SR datasheet for details). In order to have safe and reliable LED driver operation, the LED luminaires will need to comply with the relevant standards and regulations (e.g. IEC/EN 60598-1). The LED luminaire shall be designed to adequately protect the LED driver from dust, moisture and pollution. The luminaire manufacturer is responsible for the correct choice and installation of the LED drivers according to the application and product datasheets. Operating conditions of the LED drivers may never exceed the specifications as per the product datasheet.

Installation & operation

Maximum ambient and t_c temperature:

- For built-in components inside luminaires, the t_a ambient temperature range is a guideline given for the optimum operating environment. However, integrator must always ensure proper thermal management (i.e. mounting base of the driver, air flow etc.) so that the t_c point temperature does not exceed the t_c maximum limit in any circumstance.
- Reliable operation and lifetime is only guaranteed if the maximum t_c point temperature is not exceeded under the conditions of use.

Current setting

LL65HE-CC-200-450-DS LED driver features a constant current output (200 mA / 250 mA / 300 mA / 350 mA / 400 mA / 450 mA) adjustable with DIP switch.

- For the combination/current values, refer to the table on page 3.

LED driver earthing

- LL65HE-CC-200-450-DS LED driver is a protective Class I device and designed for Class I luminaires.
- If used inside **Class I** luminaires, this LED driver must always have the protective earth cable connected for safety reasons.
- The driver is designed to be used inside Class I luminaires. For usage inside **Class II** luminaires, the safety of the luminaire shall be ensured through double/reinforced insulation of live parts and through supplementary insulation of conductive parts of the casing, or any conductive parts connected to the casing, as the casing is only basic insulated from the live parts. The earth connector of the driver shall be left unconnected and there shall be no protective earth terminals in the luminaire terminal block to fulfill the requirements of IEC/EN 60598-1 for Class II luminaires. The EMC performance of the driver change when left unearthed, so it is always the responsibility of the integrator to take measures and necessary actions, for example by luminaire design to ensure the assembled luminaire complies with latest EMC standard.

Miniature Circuit Breakers (MCB)

- Type-C MCB's with trip characteristics in according to EN 60898 are recommended.
- Please see more details in "MCB information" document in each driver product page in "downloads & links" section.

Lamp failure functionality

No load

When open load is detected, driver limits output voltage according to $U_{out} (max)$ (abnormal).

Short circuit

Driver can withstand output short circuit.

Conformity & standards

General and safety requirements	EN 61347-1
Particular safety requirements for DC or AC supplied electronic control gear for LED modules	EN 61347-2-13
Additional safety requirements for AC or DC supplied electronic controlgear for emergency lighting	EN 61347-2-13, Annex J
Thermal protection class	EN 61347, C5e
Mains current harmonics	EN 61000-3-2
Limits for voltage fluctuations and flicker	EN 61000-3-3
Radio frequency interference	EN 55015
Immunity standard	EN 61547
Performance requirements	EN IEC 62384
Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers	IEEE 1789-2015
Compliant with relevant EU directives	
RoHS/REACH compliant	
CE / UKCA & ENEC marked	

Label symbols



Thermally controlled control gear, incorporating means of protection against overheating to prevent the case temperature under any conditions of use from exceeding 130 °C.



AC/DC supplied electronic control gear for emergency lighting purposes intended for connection to a centralized emergency power supply.