

LL1x120-CV24

1x120W **Constant Voltage** LED driver

- Open & short circuit protection
- Over voltage protection
- 24 V Constant voltage output
- Low voltage ripple, complying with IEEE 1789-2015 recommendation
- Maximum 120 W load
- Suitable for Class I and Class II luminaires, as well as for independent use
- Double insulated enclosure
- Suitable for use with LL1xCV-DA driver extension for DALI dimmable solutions

Product code: 5576

120 W 220-240 VAC 50-60 Hz


Connections


Parallel output connection

Mains Characteristics

| | |
|--------------------------------|--------------|
| Voltage range | 198-264 VAC, |
| Max mains current at full load | 0.7 A |
| Frequency | 50 - 60 Hz |
| Power factor | 0.95 |
| Input Power at no load | 0.5 W |

Load Output (SELV < 60 V)

| | |
|------------------------|---|
| Output voltage (U-OUT) | 24 V |
| Ripple | < ± 5%* at ≤ 120 Hz |
| PstLM | < 0.05* |
| SVM | < 0.01* *) At full power |

| | |
|-----------------------------------|-------|
| Max output current (I-OUT) | 5 A |
| Max output power | 120 W |
| Efficiency, at full load, typical | 0.88 |

Operating Conditions and Characteristics

| | |
|------------------------------|--|
| Max. temperature at tc point | +90 °C |
| Ambient temperature range | -20...+45 °C |
| Storage temperature range | -40...+80 °C |
| Maximum relative humidity | no condensation |
| Life time | 50 000 h at t _c = 80 °C 40 000 h at t _c = 85 °C 30 000 h at t _c = 90 °C (90 % survival rate) |

Connections and Mechanical Data

| | |
|-----------------------------------|------------------------------|
| Wire size | 0.5 – 1.5 mm ² |
| Wire type | solid core and fine-stranded |
| Maximum driver to LED wire length | 5 m |
| Weight | 425 g |
| IP rating | IP20 |


Conformity

| | |
|--|----------------|
| Radio Frequency Interference, acc. to | EN 55015 |
| Immunity standard, acc. to | EN 61547 |
| General and safety requirements | EN 61347-1 |
| Particular safety requirements for d.c. or a.c. supplied electronic controlgear for LED modules, acc. to | EN 61347-2-13 |
| Performance requirements, acc to | EN 62384 |
| Mains current harmonics, acc. to | EN 61000-3-2 |
| Limits for Voltage Fluctuations and Flicker | EN 61000-3-3 |
| Recommended Practices for Modulating | IEEE 1789-2015 |
| Current in High-Brightness LEDs for Mitigating Health Risks to Viewers | |

CE / UKCA and SELV marked

Note: See page 2 for dimensions

Dimensions

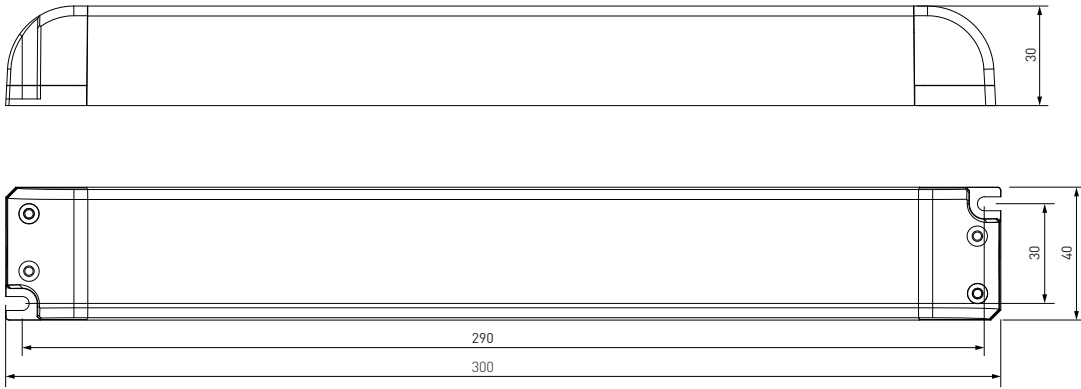

Wiring & connectivity

LL1x120-E-CV24 LED driver is suited for either in-built and independent luminaire usage. In order to have safe and reliable LED driver operation, the LED luminaires will need to comply with the relevant standards and regulations (e.g. IEC/EN 60598-1). The LED luminaire shall be designed to adequately protect the LED driver from dust, moisture and pollution. The luminaire manufacturer is responsible for the correct choice and installation of the LED drivers according to the application and product datasheets. Specifications of the LED drivers may never exceed the operating conditions as per the product datasheets.

Wiring considerations

Wire type and cross section

- Please refer to datasheets connections & mechanical data

Wiring insulation

- According to recommendations in EN 60598

Maximum wire lengths

- Please refer to datasheets connections & mechanical data

Wire connections

- Please refer to datasheets connections diagram

Miniature Circuit Breakers (MCB)

- Type-C MCB's with trip characteristics in according to EN 60898 are recommended.

Installation & operational considerations

Maximum tc temperature

- Reliable operation and lifetime is only guaranteed if the maximum tc point temperature is not exceeded under the conditions of use.

Installation site

- Ensure that the LED driver does not exceed temperature higher than specified on the product datasheets.
- The general preferred installation position of LED drivers is to have the top cover facing upwards.

Quantity of drivers per miniature circuit breaker 16 A Type C

| Based on I_{cont} (pcs.) | Based on I_{peak} (pcs.) | Typ.inrush current I_{peak} (A) | 1/2 value time Δt (μs) | Calculated energy $I_{peak}^2 \Delta t$ ($A^2 s$) |
|-------------------------------|-------------------------------|---|---|---|
| 20 | 55 | 12.8 | 308 | 0.0205 |