

Linear LED Module, LP20 Series

Product code: 5182
400 mA, 17.9 W

- Cost-efficient slim 560 mm (2 ft) linear module, high efficacy up to 186 lm/W at Tc = 65 °C (4000 K)
- Narrow width of 20 mm to suit various applications
- Modular product platform for design flexibility
- Zhaga compliant dimensions
- CCT 4000 K, other colour temperatures and CRI values available on request



| | Nominal CCT [K] | Useful luminous flux at | | Forward voltage [V] | | Luminous efficacy | | Power consumption Tc = 65 °C Typ. [W] | CRI |
|------------------------------------|-----------------|-------------------------|----------------------|---------------------|---------------------|------------------------|------------------------|---------------------------------------|------|
| | | Tc = 65 °C Typ. [lm] | Tc = 25 °C Typ. [lm] | Tc = 25 °C Min. [V] | Tc = 25 °C Max. [V] | Tc = 65 °C Typ. [lm/W] | Tc = 25 °C Typ. [lm/W] | | |
| <i>Very high efficacy @ 200 mA</i> | | | | | | | | | |
| LP20-560-840-3000lm | 4000 | 1608 | 1712 | 44 | 48 | 186 | 195 | 9.0 | > 80 |
| <i>Higher efficacy @ 300 mA</i> | | | | | | | | | |
| LP20-560-840-3000lm | 4000 | 2322 | 2476 | 44.6 | 48 | 176 | 185 | 13.4 | > 80 |
| <i>High efficacy @ 350 mA</i> | | | | | | | | | |
| LP20-560-840-3000lm | 4000 | 2646 | 2824 | 45.2 | 48 | 171 | 181 | 15.4 | > 80 |
| <i>Nominal @ 400 mA</i> | | | | | | | | | |
| LP20-560-840-3000lm | 4000 | 2988 | 3192 | 45.4 | 48 | 167 | 176 | 17.9 | > 80 |
| <i>High flux @ 500 mA</i> | | | | | | | | | |
| LP20-560-840-3000lm | 4000 | 3490 | 3868 | 46 | 48 | 160 | 168 | 22.4 | > 80 |

Electrical specifications

| Direct current supply only | LP20-560 | |
|------------------------------------|------------------|------------------|
| | Nominal current | Maximum current |
| Operating Current [mA] | 400 | 800 |
| Operating Voltage, max. [V] | 48 ¹⁾ | 48 ²⁾ |

¹⁾ At 400 mA, Tc = 25 °C

²⁾ At 800 mA, Tc = 25 °C

IP rating IP00

Mounting restrictions per maximum Uout voltage in the circuit:

≤ 320 VDC
> 320 VDC

M3 screw or plastic rivet.
Only plastic rivet or M3 with plastic ring.
No direct contact from metallic parts of the luminaire to the edges of the LED module.

Photometric specifications

| | |
|-------------------------------------|-----------------|
| Colour consistency at initial time | 3 MacAdam steps |
| Colour Rendering Index | > 80 |
| Beam angle | 120 ° |
| Photobiological risk group | RG1 unlimited |
| Energy efficiency class (2019/2015) | C |

Operating Conditions and Characteristics


| | |
|-------------------------------------|-----------------|
| Tp point (performance measurements) | Tc = 65 °C |
| Max. temperature at Tc point | 85 °C |
| Ambient temperature range | -40...+55 °C |
| Humidity | No condensation |

Lumen maintenance specifications

| Operating current | Temperature | L80B20 |
|------------------------------|-------------|------------|
| Very high efficacy 200 mA | Tc ≤ 85°C | > 80 000 h |
| Higher efficacy 300 mA | Tc ≤ 85°C | > 80 000 h |
| High efficacy 350 mA | Tc ≤ 85°C | > 80 000 h |
| Nominal 400 mA | Tc ≤ 85°C | > 80 000 h |
| High flux 500 mA | Tc ≤ 85°C | > 80 000 h |

Lumen depreciation estimations in hours. Specified LxxBxx values are statistical and based on LED components' lumen maintenance values. Actual lumen maintenance may vary over individual LED modules.

Dimensions

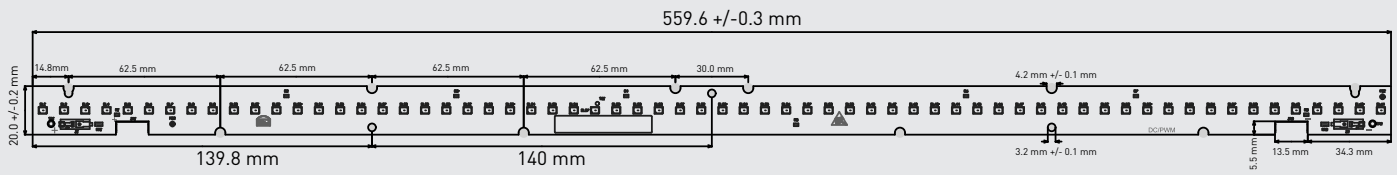

| | |
|--------|----------------|
| Length | 559.6 ± 0.3 mm |
| Width | 20.0 ± 0.2 mm |

Wiring specifications

| | |
|-------------------|--|
| Connector type | Push-in connector |
| Wire size | 0.2 - 0.75 mm ² , solid connector 0.2 - 0.75 mm ² , fine-stranded 0.25 - 0.34 mm ² , fine-stranded (with ferrule) |
| Wire strip length | 7 - 9 mm |
| Wire type | Solid core and fine-stranded |

LP20 series LED modules are suited for built-in usage in luminaires. In order to have safe and reliable operation, the LED luminaires will need to comply with the relevant standards and regulations (e.g. IEC/EN 60598-1). The LED luminaire shall be designed to adequately protect the LED modules from dust, moisture and pollution. The luminaire manufacturer is responsible for the correct choice and installation of the LED module / LED driver combination according to the application and product datasheets. Operating conditions of the LED modules may never exceed the specifications as per the product datasheets.

HANDLING OF THE LED MODULES

LED modules contain components (LED packages, chips) that are sensitive for mechanical stress, electrostatic discharge (ESD) and chemical contaminants. Improper handling of the modules might cause damage or even destruction of the LED modules. Damaged LEDs may show some unusual characteristics such as increase in leakage current, lowered turn-on voltage, or abnormal lighting of LEDs at low current. Please follow following instructions and the precautions given in the product datasheets while handling and assembling Helvar Components LED modules.

Storage conditions

- Unused LED modules are recommended to stored carefully in an original sealed ESD package preventing moisture, pollutants or ESD to cause damage the module.
- Storage temperature range: -20...+80 °C

Opening the package / resealing

- LED modules are kept in stable protected environment in the packaging, open the package only when you are ready to use the LED modules. If resealing of the original package is required remove excess air from the packaging and place the moisture absorber (silica-gel bag) in to the packaging and seal the ESD back with adhesive tape.

ESD precautions at luminaire assembly site

The LEDs are sensitive to the electrostatic discharge (ESD) and surge current. If voltage exceeding the absolute maximum rating is applied to LEDs, it may cause damage or even destruction to LED devices.

- IEC / EN 61340-5-1: Protection of electronic devices from electrostatic phenomena – General Requirements describes procedures for protection for damage caused by electrostatic discharge while handling electronic devices, following list lists basic protective measures described in the standard.

ESD protection measures in handling and assembling LED modules

- Employee training for correct handling .
- Personnel grounding via wrist band / footwear.
- ESD protective clothing / shoes.
- Handle LED modules only in ESD protected areas and workplaces.

CHEMICAL CONSIDERATIONS

Chemical substances may cause damage the LED module by causing discoloration, loss of luminous flux or total failure of the module.

Avoid materials and substances containing:

- VOCs - Volatile Organic Compounds that may occur in adhesives or sealings, verify that the materials used in the luminaires are not causing VOCs
- Halogen compounds
- Chlorine
- Acetates
- Sulphuric compounds.

ELECTRIC & THERMAL CONSIDERATIONS

Wiring insulation

- According to recommendations in IEC / EN 60598.

Wire connections

- Please refer to LED driver datasheets connections diagram.
- Wrong polarity might damage the LED modules.

Choosing the LED driver

- To guarantee the safe and reliable operation of the LED modules the LED driver must be provided with open and short circuit protection.
- These LED modules are designed to be used with constant current output type LED driver.

Electrical design, electrical safety

During the design it is luminaire manufacturers responsibility to follow the international and national electric design regulations and recommendations for the electric safety and luminaire protection. Electric safety classification and protection class is depending on:

- Actual luminaire design and safety classification
- LED driver insulation
- LED driver output isolation.

ALWAYS CHECK AND FOLLOW EXACT REGULATIONS FROM LATEST RELEVANT IEC / EN STANDARDS.

Maximum ambient and tc temperature

- The maximum ambient temperature is a guideline given for built-in components such as LED modules. However, integrator must always ensure proper thermal management (i.e. mounting base of the module, possible heatsink, air flow etc.) so that the tc point does not exceed the tc max limit.
- Reliable operation is only guaranteed if the maximum tc point temperature is not exceeded under the conditions of use.
- Lifetime is only guaranteed if the maximum tc point temperature specified for lifetime is not exceeded under the conditions of use.

MECHANICAL CONSIDERATIONS

- While handling the LED modules avoid mechanical stress or pressure applied to the light emitting surface of the LEDs.
- Avoid dropping the modules.
- Bending of the modules is not permitted.
- Avoid touching the light emitting surface.
- Mechanical modifications (e.g. drilling, milling or sawing the module) are not permitted.

INSTALLATION CONSIDERATIONS

Helvar Components LED module series are basic isolated against ground and can be installed on properly insulated metal parts of the luminaire.

Please always follow regulations from IEC/EN 60598-1 for creepage and clearance requirements.

Conformity & standards

| | |
|--|-------------------------------------|
| Led modules for general lighting - safety specifications | IEC / EN 62031 |
| Photobiological safety of lamps and lamp systems | IEC / EN 62471 TR IEC / EN 62778 |
| Compliant with relevant EU directives | |
| CE marked | |
| RoHS / REACH compliant | |

All data were deemed correct at time of creation. Helvar Components is not liable for errors or omissions.

Symbols



Built-in LED module that is designed to form a replaceable part built into a luminaire or an enclosure and not intended to be mounted outside a luminaire etc. without special precautions.