

21 W SELV constant current LED driver

Product code: 5941xxx (see last page)

21 W 220 – 240 V 50 – 60 Hz

- SELV output protection for safety and flexibility in luminaires
- Low current ripple, complying with IEEE 1789 recommendation
- Extremely compact dimensions for flexible usage
- Ideal solution for Class I and Class II luminaires
- For driving Class III (SELV) luminaires, optional strain relief for independent use outside of luminaire (LC-SR-MINI, LC-SR-MINI-B or LC-SR-MINI-LOOP)*



*See also last page.



Functional Description

- Adjustable constant current output: 150 mA to 500 mA (default)
- Current setting via dip-switches
- Overload, open & short circuit protection

Mains Characteristics

Nominal rated voltage range	220 V – 240 V, 50 – 60 Hz
AC voltage range	176 VAC – 264 VAC
DC voltage range	176 VDC - 280 VDC
Mains current at full load	0.16 A
Frequency	50 Hz – 60 Hz
Stand-by power consumption	< 0.5 W
THD at full power	< 10 %
Tested surge protection	1 kV L-N (IEC 61000-4-5) 2 kV L/N-GND (IEC 61000-4-5)
Tested fast transient protection	1 kV (IEC 61000-4-4)

Insulation between circuits & driver case

Mains circuit - SELV circuit	Double/reinforced insulation
Mains and output - Driver case	Double/reinforced insulation

Load Output (SELV <60 V)

Output current (I_{out})	150 mA – 500 mA (default)
Accuracy	$\pm 5\%$ ¹⁾
Ripple	< 2 % ²⁾ at ≤ 120 Hz
PstLM	$\leq 1\%$ ³⁾
SVM	$\leq 0.4\%$ ³⁾
U_{out} (max) (abnormal)	53 V


I_{LED}	150 mA	250 mA	500 mA
P_{Rated}	6.3 W	10.5 W	21 W
U_{LED}	10 - 42 V	10 - 42 V	10 - 42 V
PF (λ) at full load	0.73	0.86	0.95
Efficiency (η) at full load	> 84 %	> 85 %	> 85 %

1) $\pm 5\%$ at 250 - 500 mA output current. $\pm 8\%$ at 150-200 mA

2) Low frequency

3) At full power, LED load: Cree MX3 LEDs


Operating window

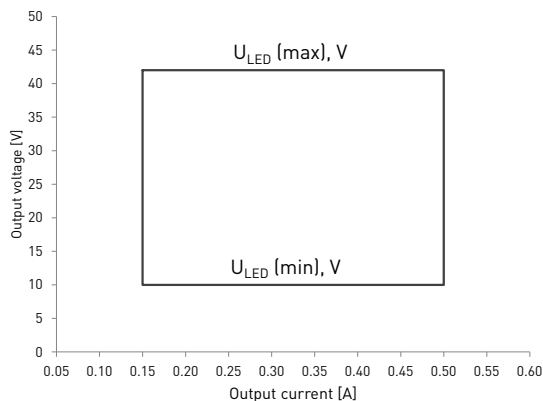


Current value is adjustable in steps via dip-switch. See dip-switch settings in page 3 for details.

Driver performance

Typical efficiency

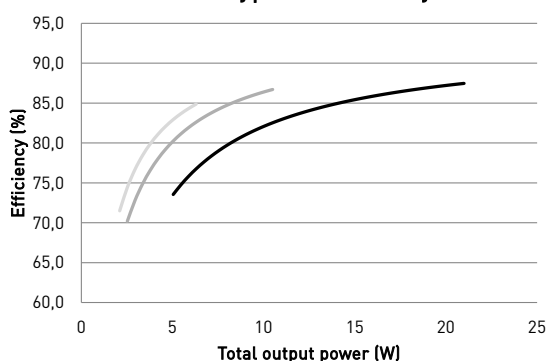

Typical power factor

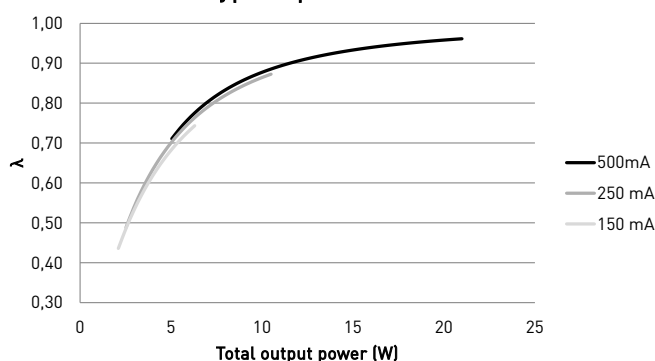

Operating Conditions and Characteristics

Absolute highest allowed t_c point temperature	65 °C
T_c life (50 000 h) temperature	60 °C
Ambient temperature range*	-20 °C ... +45 °C*
Storage temperature range	-25 °C ... +60 °C
Maximum relative humidity	No condensation
Mains switching cycles	> 100 000 cycles
Life time (90 % survival rate)	50 000 h, at $t_c = 60$ °C 30 000 h, at $t_c = 65$ °C


*) For other than independent use, higher t_a of the controlgear possible as long as highest allowed t_c point temperature is not exceeded

Quantity of drivers per miniature circuit breaker 16 A Type C

Based on inrush current I_{peak}	Typ. peak inrush current I_{peak}	1/2 value time, Δt
61 pcs.	15 A	100 μ s

CONVERSION TABLE FOR OTHER TYPES OF MINIATURE CIRCUIT BREAKER

MCB type	Relative quantity of LED drivers
B 10 A	37 %
B 16 A	60 %
B 20 A	75 %
C 10 A	62 %
C 16 A	100 % (see table above)
C 20 A	125 %

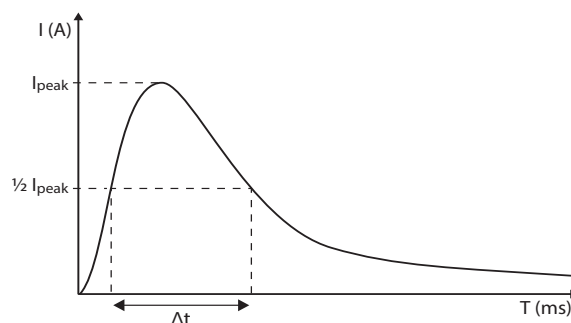

CONTINUOUS CURRENT


Total continuous current of the drivers and installation environment must always be considered and taken into calculations when installing drivers behind miniature circuit breaker. Example calculation of total drivers amount limited by continuous current: $n(I_{cont}) = [16 A (I_{nom,Ta}) / \text{"nominal mains current with full load"}] \times 0.76$. This calculation is an example according to recommended precautions due to multiple adjacent circuit breakers (> 9 MCBs) and installation environment (T_a 30 degrees); variables may vary according to the use case. Both inrush current and continuous current calculations are based on ABB S200 series circuit breakers. More specific information in ABB series S200 circuit breaker documentation.

NOTE! Type C MCB's are strongly recommended to use with LED lighting. Please see more details in "MCB information" document in each driver product page in "downloads & links" section.

Connections and Mechanical Data

Wire size	0.5 mm ² – 1.5 mm ²
Wire type	Solid core and fine-stranded
Wire insulation	According to EN 60598
Maximum driver to LED wire length	1.5 m
Weight	76 g
IP rating	IP20


Connections

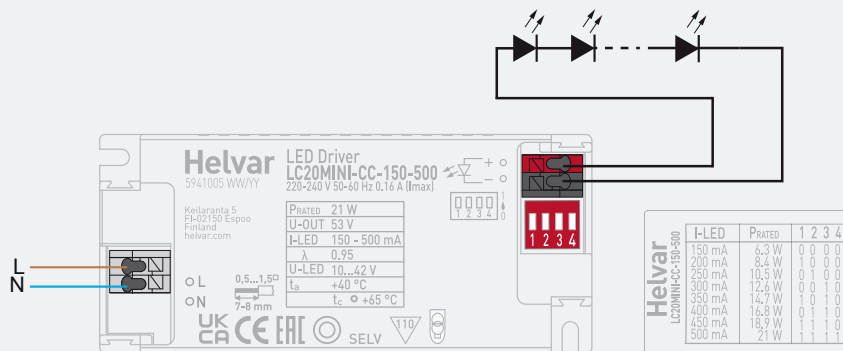

Note:

- Not suitable for load side switching operation

Dimensions (mm)

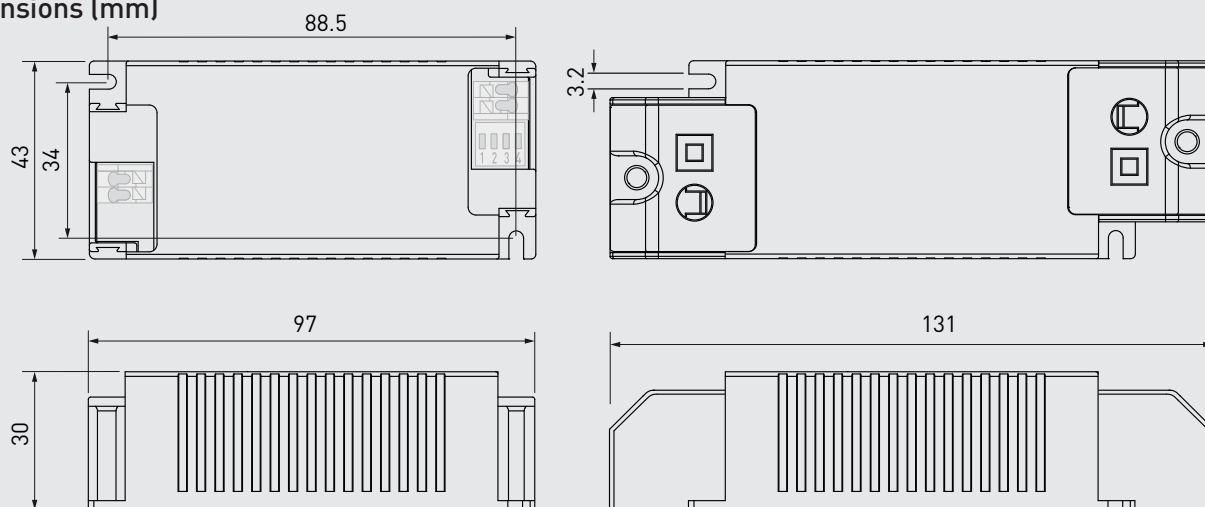

In LC20MINI-CC-150-500, the current can be set with dip-switches. With each combination of switch setup, a different output current value can be set. The maximum value can be reached with all switches set to "1" (pushed towards LED output connector, see connections picture above) and minimum with all switches set to "0". The output current values according to the dip-switch settings are presented below.

Dip-switch combinations, output currents and voltage ranges (Nominal I_{out} ($\pm 5\%$ tol.))

Dip-Switch combination	0000	1000	0100	0010	1010	0110	1110	1111
I_{out} (mA)	150	200	250	300	350	400	450	500
Voltage range	10 - 42 V	10 - 42 V	10 - 42 V	10 - 42 V	10 - 42 V	10 - 42 V	10 - 42 V	10 - 42 V

* $\pm 5\%$ at 250 - 500 mA output current. $\pm 8\%$ at 150-200 mA

LC20MINI-CC-150-500 LED driver is suited for built-in usage in luminaires. With external strain relief (LC-SR-MINI, LC-SR-MINI-B or LC-SR-MINI-LOOP), independent use is possible too. In order to have safe and reliable LED driver operation, the LED luminaires will need to comply with the relevant standards and regulations (e.g. IEC/EN 60598-1). The LED luminaire shall be designed to adequately protect the LED driver from dust, moisture and pollution. The luminaire manufacturer is responsible for the correct choice and installation of the LED drivers according to the application and product datasheets. Operating conditions of the LED drivers may never exceed the specifications as per the product datasheet.

Installation & operation

Maximum ambient and t_c temperature:

- For built-in components inside luminaires, the t_a ambient temperature range is a guideline given for the optimum operating environment. However, integrator must always ensure proper thermal management (i.e. mounting base of the driver, air flow etc.) so that the t_c point temperature does not exceed the t_c maximum limit in any circumstance.
- Reliable operation and lifetime is only guaranteed if the maximum t_c point temperature is not exceeded under the conditions of use.

Current setting via dip-switch

LC20MINI-CC-150-500 LED driver features a constant current output adjustable via dip-switch combinations

- For the combination/current values, refer to the table on page 3.

Miniature Circuit Breakers (MCB)

- Type-C MCB's with trip characteristics in according to EN 60898 are recommended.
- Please see more details in "MCB information" document in each driver product page in "downloads & links" section.

Installation site

- The general preferred installation position of LED drivers for independent use is to have the top cover facing upwards.

Lamp failure functionality

No load

When open load is detected, driver limits output voltage according to $U_{out} (max)$ (abnormal).

Overload

Driver can withstand overload, however reliable operation is only guaranteed in specified voltage range.

Short circuit

Driver can withstand output short circuit.

Conformity & standards

General and safety requirements	EN 61347-1
Particular safety requirements for DC or AC supplied electronic control gear for LED modules	EN 61347-2-13
Mains current harmonics	EN 61000-3-2
Limits for voltage fluctuations and flicker	EN 61000-3-3
Radio frequency interference	EN 55015
Immunity standard	EN 61547
Performance requirements	EN 62384
Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers	IEEE 1789-2015
Compliant with relevant EU directives	
RoHS/REACH compliant	
CE marked	

Label symbols



Safety isolating control gear with short circuit protection (SELV control gear).



Double insulated control gear suitable for built-in use.



Thermally controlled control gear, incorporating means of protection against overheating to prevent the case temperature under any conditions of use from exceeding 110 °C.

LC20MINI-CC-150-500 LED driver can be ordered as just the built-in LED driver itself or then as a combination package with strain reliefs for input and output side. Input strain relief is a LOOPing model with the connector block inside, output strain relief is screwless easy-to-use model. Everything is preassembled from the factory, ready to be connected to your LED luminaire! Please refer to the order codes in the table below.

ORDER CODES

	Order code	Product name	What is included
<i>LC20MINI-CC-150-500</i>			
Product order codes	5941	LC20MINI-CC-150-500	LC20MINI-CC-150-500 LED driver
	5941025	LC20MINI-CC-150-500-LOOP	LC20MINI-CC-150-500 LED driver and LC-SR-MINI-LOOP + LC-SR-MINI-B screwless strain reliefs (input + output), preassembled

