

## Linear LED Module, LDL Series

Product code: 5172400

**1200 mA, 21.2 V**

- 560 mm module, ideal solution with LEDiL DAISY optics\*
- Accurate initial colour consistency of MacAdam (SDCM) 3-step
- Designed for easy installation and series connection

\*See page 5 for details



	Nominal colour temperature [K]	Luminous flux ( $\Phi_v$ )		Forward voltage ( $V_f$ )		Luminous efficacy		Power consumption Tc = 65 °C Typ. [W]	CRI		
		Tc = 65 °C		Tc = 25 °C		Tc = 65 °C				Tc = 25 °C	
		Typ. [lm]	Typ. [lm]	Typ. [V]	Max. [V]	Typ. [lm/W]	Typ. [lm/W]				
<i>Efficient @ 1050 mA</i>											
<b>LDL-562-840-3700lm</b>	4000	3240	3480	20.9	22.3	148	157	21.9	> 80		
<i>Nominal @ 1200 mA</i>											
<b>LDL-562-840-3700lm</b>	4000	3700	3960	21.2	22.6	145	154	25.4	> 80		
<i>Maximum @ 1400 mA</i>											
<b>LDL-562-840-3700lm</b>	4000	4190	4500	21.6	23.0	139	147	30.2	> 80		

Tolerance for the values of CCT, luminous flux and forward voltage in the table is  $\pm 7\%$

### Electrical specifications

	LDL-562	
	Nominal	Max.
<i>Direct current supply only</i>		
<b>Operating Current [mA]</b>	1200	1400
<b>Operating Voltage [V]</b>	21.2 <sup>1)</sup>	23.0 <sup>2)</sup>

<sup>1)</sup> At 1200 mA, Tc = 65 °C,

<sup>2)</sup> At 1400 mA, Tc = 25 °C

Maximum rated voltage in circuit	250 V <sup>1)</sup>
Insulation test voltage	1.5 kV
Max. permissible peak current	2.4 A (Duty 1/10 pulse width 10ms)
IP rating	IP00

<sup>1)</sup> More details on page 4

### Photometric specifications

Colour consistency at initial time	3 MacAdam steps
Colour Rendering Index	> 80
Beam angle	120°
Photobiological risk group	RG1

### Lifetime specifications


Operating current	Temperature	L90B10	L90B50	L80B10	L80B50	L70B10	L70B50
<b>Efficient 1050 mA</b>	Tc = 60 °C	> 14 000	> 14 000	> 28 000	> 31 000	> 45 000	> 48 000
	Tc = 70 °C	> 12 000	> 12 000	> 24 000	> 26 000	> 39 000	> 41 000
	Tc = 80 °C	> 9 000	> 10 000	> 19 000	> 21 000	> 31 000	> 32 000
<b>Nominal 1200 mA</b>	Tc = 60 °C	> 13 000	> 14 000	> 26 000	> 29 000	> 43 000	> 47 000
	Tc = 70 °C	> 11 000	> 11 000	> 22 000	> 23 000	> 34 000	> 40 000
	Tc = 80 °C	> 9 000	> 10 000	> 19 000	> 21 000	> 31 000	> 32 000
<b>Maximum 1400 mA</b>	Tc = 60 °C	> 12 000	> 13 000	> 25 000	> 28 000	> 40 000	> 45 000
	Tc = 70 °C	> 10 000	> 11 000	> 22 000	> 23 000	> 34 000	> 36 000
	Tc = 80 °C	> 8 000	> 9 000	> 18 000	> 19 000	> 29 000	> 31 000

Lumen depreciation estimations in hours

### Operating Conditions and Characteristics

Typ point (performance measurements)	Tc = 65 °C
<b>Max. temperature at Tc point</b>	<b>80 °C</b>
Ambient temperature range	-20...+50 °C
Storage temperature	-20...+80 °C
Humidity	No condensation

## Dimensions

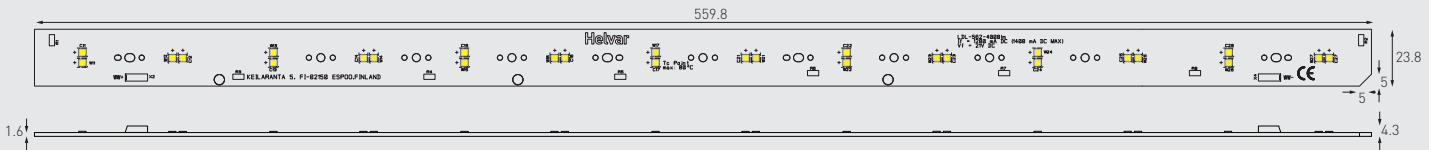

Length	559.8 ± 0.2 mm
Width	23.8 ± 0.2 mm
Thickness of PCB	1.6 ± 0.2 mm
Height	4.3 ± 0.2 mm

Packing details	1 Tray	1 Box
Num. of modules	30	150


ESD foam trays, antistatic bag and carton box

## Wiring specifications

Connector type	Push-in connector
Wire size	0.20 - 0.50 mm <sup>2</sup> , solid core
Wire strip length	4.5 - 5.5 mm
Wire type	Solid core and fine-stranded


## Thermal Management

Tc (Tp) Point : See the below red mark.

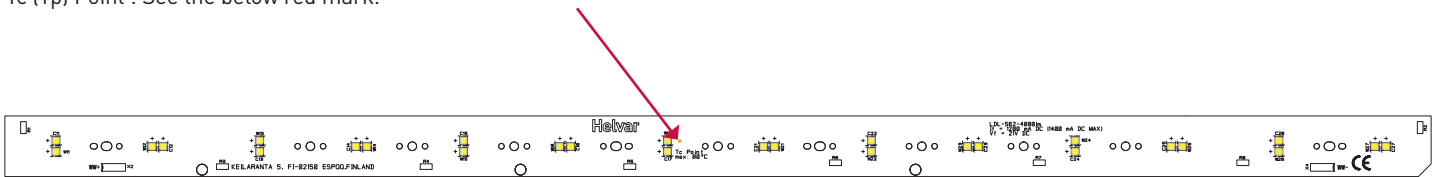


## Connection examples

2 x LDL-562-840-3700lm module connected with Helvar Components With LL50SE-DA-100-1400 LED driver at 1200 mA driving current. With LL50SE-DA-100-1400 LED Driver, the selected output current is reached with 1200 mA LED-Iset resistor (T91200, resistance value 4.12 kΩ) or via NFC. Nominal lumen output with the following setup is 7400 lm.

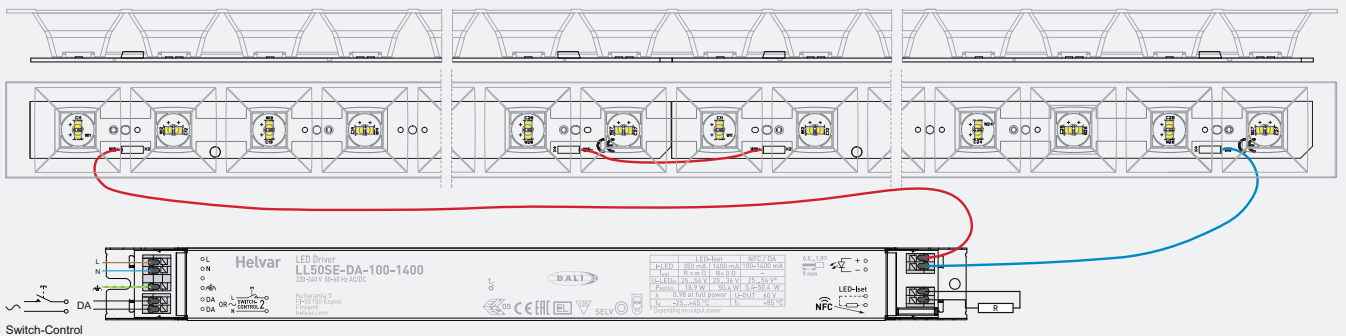


## Specification diagrams


### LUMINOUS FLUX VS FORWARD CURRENT

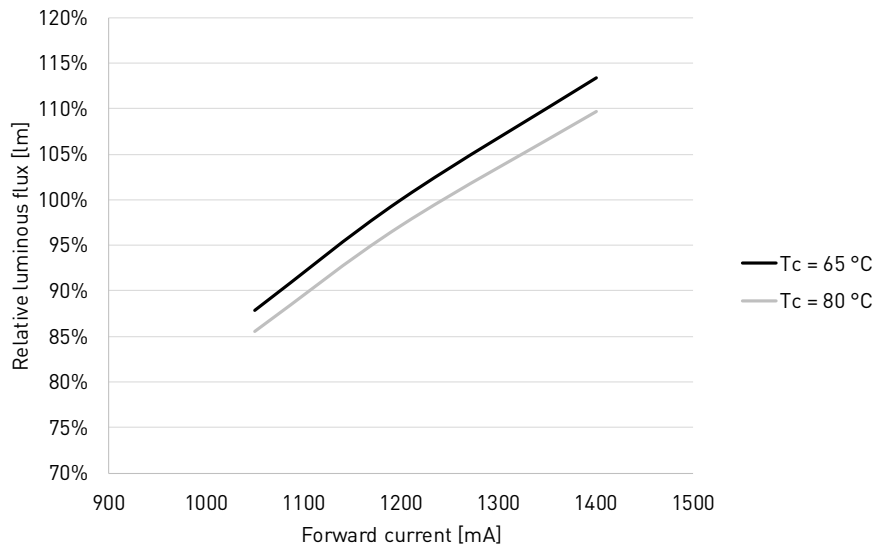

### FORWARD VOLTAGE VS FORWARD CURRENT

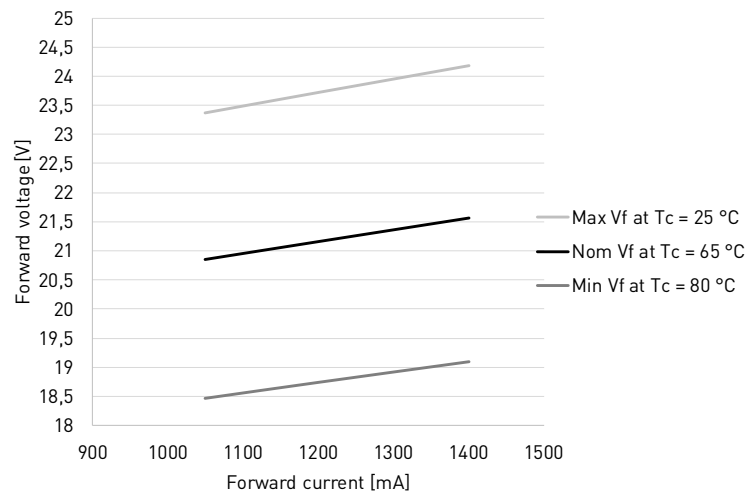

### DERATING CURVE

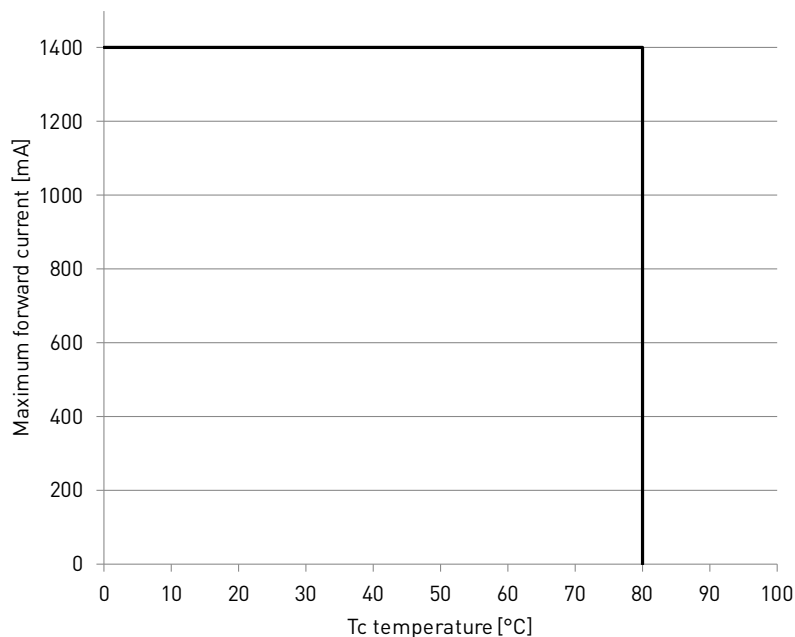

LDL-562 LED module is suited for built-in usage in luminaires. In order to have safe and reliable operation, the LED luminaires will need to comply with the relevant standards and regulations (e.g. IEC/EN 60598-1). The LED luminaire shall be designed to adequately protect the LED modules from dust, moisture and pollution. The luminaire manufacturer is responsible for the correct choice and installation of the LED module / LED driver combination according to the application and product datasheets. Operating conditions of the LED modules may never exceed the specifications as per the product datasheets.

## HANDLING OF THE LED MODULES

LED modules contain components (LED packages, chips) that are sensitive for mechanical stress, electrostatic discharge (ESD) and chemical contaminants. Improper handling of the modules might cause damage or even destruction of the LED modules. Damaged LEDs may show some unusual characteristics such as increase in leakage current, lowered turn-on voltage, or abnormal lighting of LEDs at low current. Please follow following instructions and the precautions given in the product datasheets while handling and assembling Helvar Components LED modules.

### Storage conditions

- Unused LED modules are recommended to stored carefully in an original sealed ESD package preventing moisture, pollutants or ESD to cause damage the module.
- Storage temperature range: -20...+80 °C

### Opening the package / resealing

- LED modules are kept in stable protected environment in the packaging, open the package only when you are ready to use the LED modules. If resealing of the original package is required remove excess air from the packaging and place the moisture absorber (silica-gel bag) in to the packaging and seal the ESD back with adhesive tape.

### ESD precautions at luminaire assembly site

The LEDs are sensitive to the electrostatic discharge (ESD) and surge current. If voltage exceeding the absolute maximum rating is applied to LEDs, it may cause damage or even destruction to LED devices.

- IEC / EN 61340-5-1: Protection of electronic devices from electrostatic phenomena – General Requirements describes procedures for protection for damage caused by electrostatic discharge while handling electronic devices, following list lists basic protective measures described in the standard.

### ESD protection measures in handling and assembling LED modules

- Employee training for correct handling .
- Personnel grounding via wrist band / footwear.
- ESD protective clothing / shoes.
- Handle LED modules only in ESD protected areas and workplaces.

## CHEMICAL CONSIDERATIONS

Chemical substances may cause damage the LED module by causing discoloration, loss of luminous flux or total failure of the module.

Avoid materials and substances containing:

- VOCs - Volatile Organic Compounds that may occur in adhesives or sealings, verify that the materials used in the luminaires are not causing VOCs
- Halogen compounds
- Chlorine
- Acetates
- Sulphuric compounds.

Never look directly into an operational LED module without suitable protective eye wear!

## ELECTRIC & THERMAL CONSIDERATIONS

### Wiring insulation

- According to recommendations in IEC / EN 60598.

### Wire connections

- Please refer to LED driver datasheets connections diagram.
- Wrong polarity might damage the LED modules.

### Choosing the LED driver

- To guarantee the safe and reliable operation of the LDL series LED-modules the LED driver must be provided with open and short circuit protection.
- LDL series modules are designed to be used with constant current output type LED driver.

### Electrical design, electrical safety

During the design it is luminaire manufacturers responsibility to follow the international and national electric design regulations and recommendations for the electric safety and luminaire protection. Electric safety classification and protection class is depending on:

- Actual luminaire design and safety classification
- LED driver insulation
- LED driver output isolation.

ALWAYS CHECK AND FOLLOW EXACT REGULATIONS FROM LATEST RELEVANT IEC / EN STANDARDS.

### Maximum ambient and tc temperature

- The maximum ambient temperature is a guideline given for built-in components such as LED modules. However, integrator must always ensure proper thermal management (i.e. mounting base of the module, possible heatsink, air flow etc.) so that the tc point does not exceed the tc max limit.
- Reliable operation is only guaranteed if the maximum tc point temperature is not exceeded under the conditions of use.
- Lifetime is only guaranteed if the maximum tc point temperature specified for lifetime is not exceeded under the conditions of use.

## MECHANICAL CONSIDERATIONS

- While handling the LED modules avoid mechanical stress or pressure applied to the light emitting surface of the LEDs.
- Avoid dropping the modules.
- Bending of the modules is not permitted.
- Avoid touching the light emitting surface.
- Mechanical modifications (e.g. drilling, milling or sawing the module) are not permitted.

## INSTALLATION CONSIDERATIONS

The LDL series modules are basic isolated against ground and can be installed on properly insulated metal parts of the luminaire. We recommend using Helvar Components LMC mounting parts, plastic screws, clips or a combination of M4 metal screws and insulating plastic washers for safe operation.

Please follow regulations from IEC/EN 60598-1 for creepage and clearance requirements. More information in LS/LP Series installation guide, available on product website's Download & Links section.

## Conformity & standards

Led modules for general lighting - safety specifications	IEC / EN 62031
Photobiological safety of lamps and lamp systems	IEC / EN 62471
Compliant with relevant EU directives	
CE marked	
RoHS / REACH compliant	

All data were deemed correct at time of creation. Helvar Components is not liable for errors or omissions.

## Compatible LEDiL optics

Following LEDiL optics are compatible with LDL-562 LED module. More information about LEDiL optics is available at [www.LEDiL.com](http://www.LEDiL.com).

DAISY-28X1 (shade)
DAISY-4X1 (optics)
DAISY-7X1 (optics)