

110 W **Constant Current** LED driver

Product code: 5538

110 W 220 – 240 V 0 / 50 – 60 Hz

- Very high efficiency up to 95%
- Low current ripple, complying with IEEE 1789 recommendation
- Long lifetime up to 100 000 h
- Suitable for DC use
- Driver protection Class I
- Ideal solution for Class I luminaires, suitable for Class II luminaires too*



* See page 4 for details.

Functional Description

- Adjustable constant current output: 200 mA (default) to 350 mA
- Current setting with external resistor
- Open & short circuit protection

Illustrative only, the driver mechanics have been updated from this photo, see connections and dimensions pictures in this datasheet for the latest information..

Mains Characteristics

Voltage range	198 VAC – 264 VAC
	Withstands max. 320 VAC (max. 1 hour)
DC range	176 VDC – 280 VDC
starting voltage	> 190 VDC
Mains current at full load	0.40 – 0.60 A
Frequency	0 / 50 Hz – 60 Hz
THD at full power	< 10 %
Leakage current to earth	< 0.3 mA
Tested surge protection	1 kV L-N, 2 kV L-GND (IEC 61000-4-5)
Tested fast transient protection	2 kV (IEC 61000-4-4)

Insulation between circuits & driver case


Mains circuit - Output	Non-isolated
Mains and output - Driver case	Basic insulation

Load Output (non-isolated)



Output current (I_{out})	200 mA (default) – 350 mA
Accuracy	$\pm 5 \%$
Ripple	< 2 %* at ≤ 120 Hz
	*] Low frequency, LED load: Cree XP-G
PstLM	< 0.02*
SVM	< 0.01*
	*] At full load, measured with Cree XP-G LED modules.
U_{OUT} (max) (abnormal)	400 V

I_{LED}	200 mA	350 mA
P_{RATED}	70 W	110 W
U_{LED}	120 – 350 V	120 – 314 V
PF (λ) at full load	0.98	0.98
Efficiency (η) at full load	94 %	95 %

Operating window

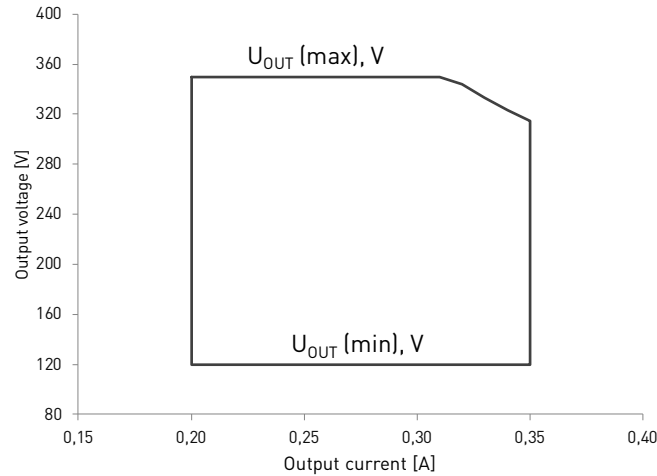

Driver performance

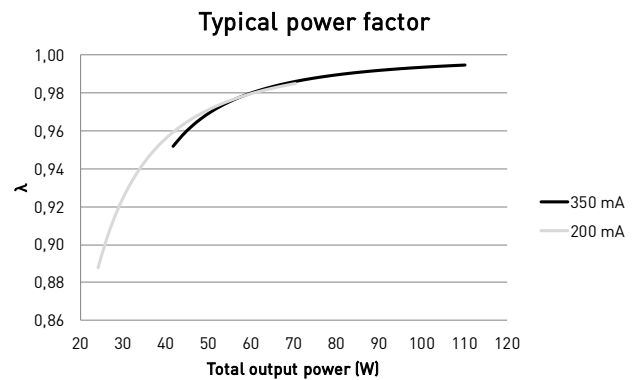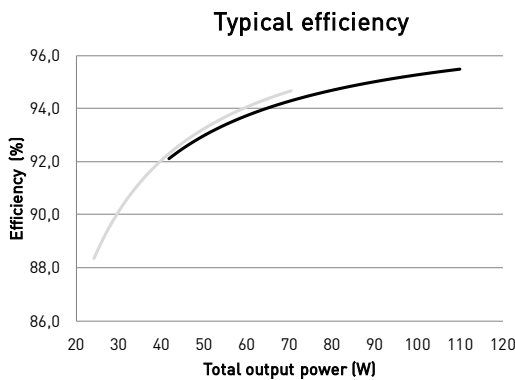

Operating Conditions and Characteristics

Highest allowed t_c point temperature*	85 °C
t_c life (50 000 h) temperature	75 °C
Ambient temperature range**	-25 °C ... +50 °C
in independent use	-25 °C ... +40 °C
Storage temperature range	-40 °C ... +80 °C
Maximum relative humidity	No condensation
Mains switching cycles	> 100 000 cycles
Lifetime (90 % survival rate)	100 000 h, at $t_c = 65$ °C 50 000 h, at $t_c = 75$ °C 25 000 h at $t_c = 85$ °C

*) ENEC certified only up to t_c life temperature


**) For other than independent use, higher t_a of the control gear possible as long as highest allowed t_c point temperature is not exceeded

Quantity of drivers per miniature circuit breaker 16 A Type C

Based on I_{cont}	Based on inrush current I_{peak}	Typ. peak inrush current I_{peak}	1/2 value time, Δt	Calculated energy, $I_{peak}^2 \Delta t$
22 pcs.	24 pcs.	42,3 A	232 μ s	0.301 A ² s

CONVERSION TABLE FOR OTHER TYPES OF MINIATURE CIRCUIT BREAKER

MCB type	Relative quantity of LED drivers
B 10 A	37 %
B 16 A	60 %
B 20 A	75 %
C 10 A	62 %
C 16 A	100 % (see table above)
C 20 A	125 %

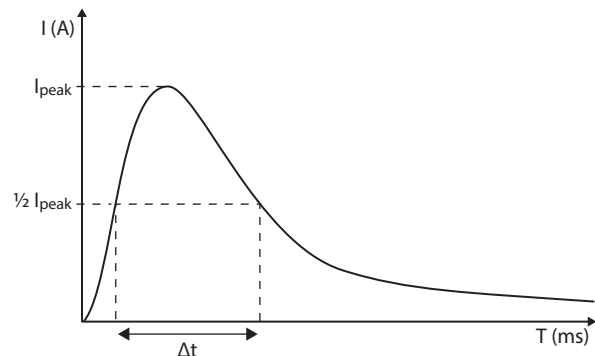


Type C MCB's are strongly recommended to use with LED lighting. Please see more details in "MCB information" document in each driver product page in "downloads & links" section.

Connections and Mechanical Data

Wire size	0.5 mm ² – 1.5 mm ²
Wire type	Solid core and fine-stranded
Wire insulation	According to EN 60598
Maximum driver to LED wire length	5 m
Weight	173 g
IP rating	IP20


Connections

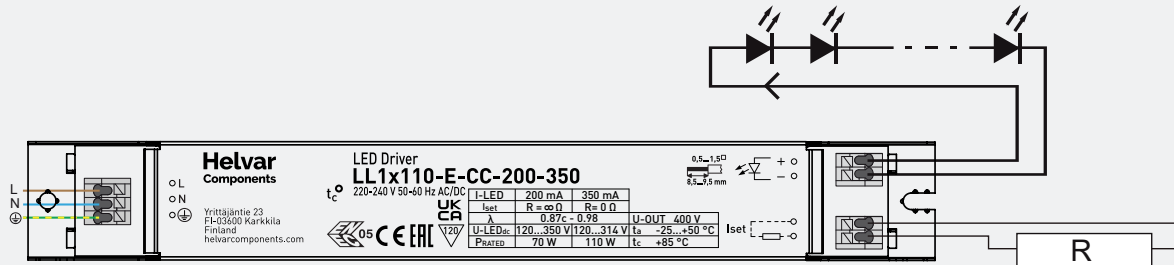

Note:

- Not suitable for load side switching operation
- *T_a* range update from -20 °C to -25 °C in labels of drivers produced from 3/2021 onwards

Dimensions (mm)

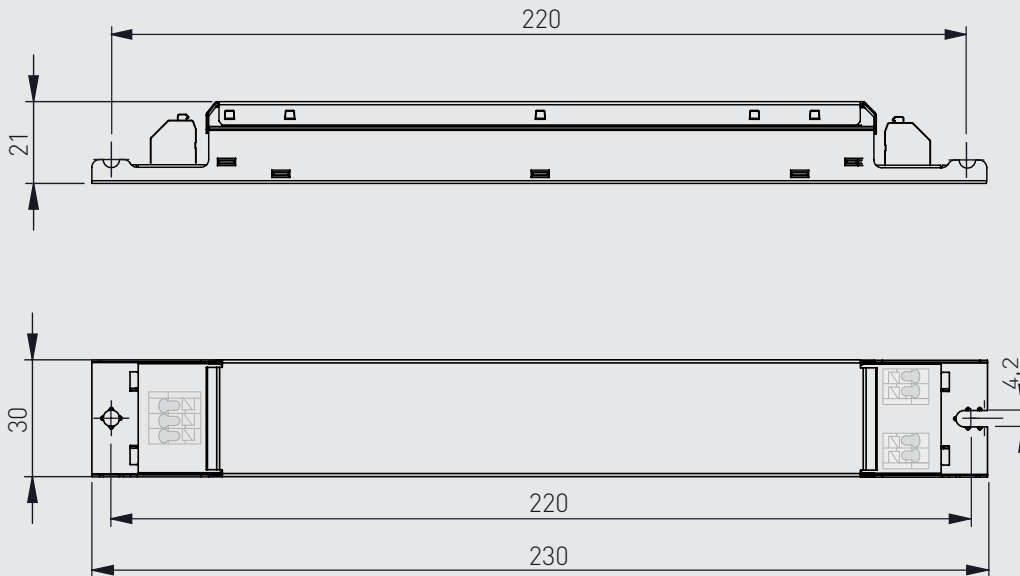

Output current can be set with the current setting resistor connected to the Iset terminal. Example current and resistor values across the range can be found in the following table. More information about the current setting resistor is given on page 4.

Iset current setting resistor values

R(Ω)	0	470	1k	1,5k	2,2k	3,3k	3,9k	5,6k	6,8k	10k	12k	18k	27k	47k	100k	∞
I _{out} (mA)	350	340	330	320	310	300	290	280	270	260	250	240	230	220	210	200
Order Code	T70000	T70471	T70102	T70152	T70222	T70332	T70392	T70562	T70682	T70103	T70123	T70183	N/A	N/A	N/A	N/A

LL1x110-E-CC-200-350 LED driver is suited for built-in usage in luminaires. With LL1x2130-SR strain reliefs, independent use is possible too (see the LL1x2130-SR datasheet for details). In order to have safe and reliable LED driver operation, the LED luminaires will need to comply with the relevant standards and regulations (e.g. IEC/EN 60598-1). The LED luminaire shall be designed to adequately protect the LED driver from dust, moisture and pollution. The luminaire manufacturer is responsible for the correct choice and installation of the LED drivers according to the application and product datasheets. Operating conditions of the LED drivers may never exceed the specifications as per the product datasheet.

Installation & operation

Maximum ambient and t_c temperature:

- For built-in components inside luminaires, the t_a ambient temperature range is a guideline given for the optimum operating environment. However, integrator must always ensure proper thermal management (i.e. mounting base of the driver, air flow etc.) so that the t_c point temperature does not exceed the t_c maximum limit in any circumstance.
- Reliable operation and lifetime is only guaranteed if the maximum t_c point temperature is not exceeded under the conditions of use.

Current setting resistor

LL1x110-E-CC-200-350 LED driver features a constant current output adjustable via current setting resistor.

- An external resistor can be inserted in to the current setting terminal, allowing the user to adjust the LED driver output current.
- When no external resistor is connected, then the LED drivers will operate at their default lowest current level.
- A standard through-hole resistor can be used for the current setting. To achieve the most accurate output current it is recommended to select a quality low tolerance resistor. Minimum diameter for resistor leg is 0.51mm.
- Always connect the current setting resistor only into the terminals marked with I_{set} on the LED driver label.
- For the resistor/current value selection, refer to the table on page 3.
- For drivers not providing isolation (non-isolated), current setting resistor must be insulated according safety regulations.

LED driver earthing

- LL1x10-42-E-CC LED driver is a protective Class I device and designed for Class I luminaires.
- If used inside **Class I** luminaires, this LED driver must always have the protective earth cable connected for safety reasons.
- If used inside **Class II** luminaires, the safety of the luminaire shall be ensured through double/reinforced insulation of live parts. This LED driver is only basic insulated, and provided that luminaire insulation is done according to the latest standards (e.g. IEC/EN 60598-1), to fulfill the requirements of the standard the earth terminal of the driver **must be left unconnected**. No protective earth symbols shall be visible in the luminaire connector block or elsewhere in the luminaire. However, the EMC performance of Class I LED drivers change when left unearthed, so it is always the responsibility of the integrator to take measures to ensure that the assembled luminaire complies with latest EMC standards.

Miniature Circuit Breakers (MCB)

- Type-C MCB's with trip characteristics in according to EN 60898 are recommended.
- Please see more details in "MCB information" document in each driver product page in "downloads & links" section.

Installation site

- The general preferred installation position of LED drivers for independent use is to have the top cover facing upwards.

Lamp failure functionality

No load

When open load is detected, driver limits output voltage according to $U_{out} (max)$ (abnormal).

Overload

Driver can withstand overload, however reliable operation is only guaranteed in specified voltage range.

Underload

Reliable operation of the driver is only guaranteed in specified voltage range.

Short circuit

Driver can withstand output short circuit.

Conformity & standards

General and safety requirements	EN 61347-1
Particular safety requirements for DC or AC supplied electronic control gear for LED modules	EN 61347-2-13
Thermal protection class	EN 61347, C5e
Mains current harmonics	EN 61000-3-2
Limits for voltage fluctuations and flicker	EN 61000-3-3
Radio frequency interference	EN 55015
Immunity standard	EN 61547
Performance requirements	EN 62384
Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers	IEEE 1789-2015
Compliant with relevant EU directives	
RoHS/REACH compliant	
ENEC and CE / UKCA marked	

Label symbols



Thermally controlled control gear, incorporating means of protection against overheating to prevent the case temperature under any conditions of use from exceeding 120 °C.