

Linear LED Module, LS Series

- Gen 2, high efficacy up to 163 lm/W
- Homogenous light distribution, 11.5 mm pitch between LEDs
- Accurate colour matching (SDCM), 3-step MacAdam
- High colour rendering index CRI > 80
- Easy connection with push-in connectors
- Modular product platform for design flexibility
- Easy installation
- Zhaga compliant dimensions
- Compatible with LEDiL optics*

350 mA, 47.2 V



*See page 5 for details

| | Nominal CCT (K) | Useful luminous flux Φ _v | | | Forward voltage | | | | | | Power consumption | Efficacy | CRI |
|---------------------------|--------------------|--|--------------|--------------|------------------------|-------------|-------------|------------------------|-------------|-------------|------------------------|------------------------|-------------|
| | | T _c = 65 °C | | | T _c = 25 °C | | | T _c = 65 °C | | | T _c = 65 °C | T _c = 65 °C | CRI (Ra) |
| | | Min. (lm) | Typ. (lm) | Max. (lm) | Min. (V) | Typ. (V) | Max. (V) | Min. (V) | Typ. (V) | Max. (V) | Typ. (W) | Typ. (lm/W) | |
| <i>Efficient @ 250 mA</i> | | | | | | | | | | | | | |
| LS-562-830-025A | 3000 | 1700 | 1780 | 1860 | 44.2 | 46.4 | 49.0 | 42.8 | 45.6 | 47.6 | 11.4 | 155 | > 80 |
| LS-562-840-025A | 4000 | 1800 | 1880 | 1960 | 44.2 | 46.4 | 49.0 | 42.8 | 45.6 | 47.6 | 11.4 | 163 | > 80 |
| <i>Nominal @ 350 mA</i> | | | | | | | | | | | | | |
| LS-562-830-025A | 3000 | 2360 | 2460 | 2560 | 46.0 | 47.9 | 50.8 | 44.6 | 47.2 | 49.4 | 16.5 | 149 | > 80 |
| LS-562-840-025A | 4000 | 2480 | 2580 | 2680 | 46.0 | 47.9 | 50.8 | 44.6 | 47.2 | 49.4 | 16.5 | 156 | > 80 |
| <i>Maximum @ 450 mA</i> | | | | | | | | | | | | | |
| LS-562-830-025A | 3000 | 2980 | 3100 | 3220 | 47.6 | 49.3 | 52.4 | 46.2 | 48.6 | 51.0 | 21.9 | 141 | > 80 |
| LS-562-840-025A | 4000 | 3120 | 3240 | 3360 | 47.6 | 49.3 | 52.4 | 46.2 | 48.6 | 51.0 | 21.9 | 148 | > 80 |

Electrical specifications

| | LS-562A | | |
|---------------------------------|---------|------|------|
| | Min. | Nom. | Max |
| <i>at T_c = 65 °C</i> | | | |
| Operating Current (mA) | - | 350 | 450 |
| Operating Voltage (V) | - | 47.2 | 51.0 |
| Power Consumption (W) | - | 16.5 | - |

*) Direct current supply only

| | |
|----------------------------------|--|
| Maximum rated voltage in circuit | 400 V (r.m.s) |
| Insulation test voltage | 1.8 kV |
| Max. permissible peak current | 900 mA (Duty 1/10 pulse width 10ms) |
| IP rating | IP00 |

Photometric specifications

| | |
|-------------------------------------|-----------------|
| Colour consistency at initial time | 3 MacAdam steps |
| Colour Rendering Index | > 80 RA |
| Photobiological risk group | RG1 unlimited |
| Energy efficiency class (2019/2015) | D |

Lifetime specifications

| Operating current | T _c Temp. | L70B50 | L70B20 | L70B10 | L80B50 | L80B10 | L90B50 |
|-----------------------|----------------------|-------------------------|---------|---------|---------|---------|---------|
| | | Efficient 250 mA | 65 °C | >50 000 | >50 000 | >50 000 | >50 000 |
| | 80 °C | >50 000 | >50 000 | >50 000 | >50 000 | >46 000 | >31 000 |
| Nominal 350 mA | 65 °C | >50 000 | >50 000 | >50 000 | >50 000 | >49 000 | >35 000 |
| | 80 °C | >50 000 | >50 000 | >50 000 | >50 000 | >45 000 | >30 000 |
| Maximum 450 mA | 65 °C | >50 000 | >50 000 | >50 000 | >50 000 | >48 000 | >34 000 |
| | 80 °C | >50 000 | >50 000 | >50 000 | >50 000 | >44 000 | >29 000 |



Lumen depreciation estimations in hours

Operating Conditions and Characteristics


| | |
|--------------------------------------|------------------------|
| Tip point (performance measurements) | T _c = 65 °C |
| Max.temperature at tc point | 80 °C |
| Operating temperature range | -20...+50 °C |
| Humidity | no condensation |

EPREL parameters

| | |
|--|--|
| EPREL ID | 1527855 (3000 K) 1526787 (4000 K) |
| Date of first placement on the market | 01-07-2015 |
| Angle for useful luminous flux | Sphere 360 degrees |
| Is the product equipped with an integrated light source? | No |
| Total luminous flux | 2460 lm (3000 K) 2580 lm (4000 K) |
| Is this product a light source? | Yes |
| Beam angle in degrees | 120 |
| On-mode power P _{on} | 16.5 |
| Networked standby power P _{net} | 0 |
| Lifetime L70B50 | 60000 |
| Power Factor | — |
| Connected light source | No |
| Useful luminous flux Φ _{use} | 2460 lm (3000 K) 2580 lm (4000 K) |
| Non-directional or directional light source | NDLS |
| Mains or non-mains light source | NMLS |
| Colour-tuneable light source | No |
| Chromaticity coordinates x i y | x: 0.4343; y: 0,40286 (3000 K) x: 0.3825; y: 0,3798 (4000 K) |
| Dimmable | Yes (with dimmable control gear) |
| Peak luminous intensity | — cd |
| R9 colour rendering index value | 4 (3000 K) 13 (4000 K) |
| Survival factor | > 0.9 |
| Lumen maintenance factor X _{LMF} | > 0.96 |
| Colour consistency in McAdam ellipses | 3 |
| Flicker metric P _{stLM} | — |
| Standby power P _{sb} | — |
| Stroboscopic effect metric SVM | — |
| Form of the product | Linear |
| Energy efficiency class 2019/2015 | D (3000 K: 2460 lm / 16.5 W x 0.926 = 138.1 lm/W) D (4000 K: 2580 lm / 16.5 W x 0.926 = 144.8 lm/W) |
| Minimum purchase quantity | 30 pcs |
| Displacement factor D _f | — |

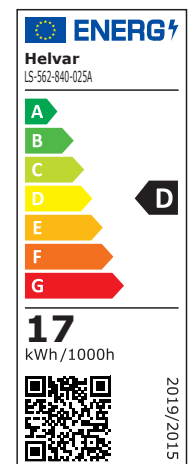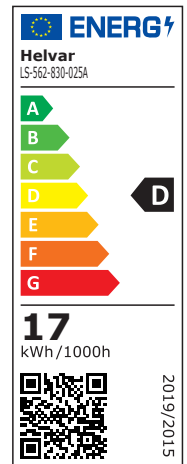

Dimensions

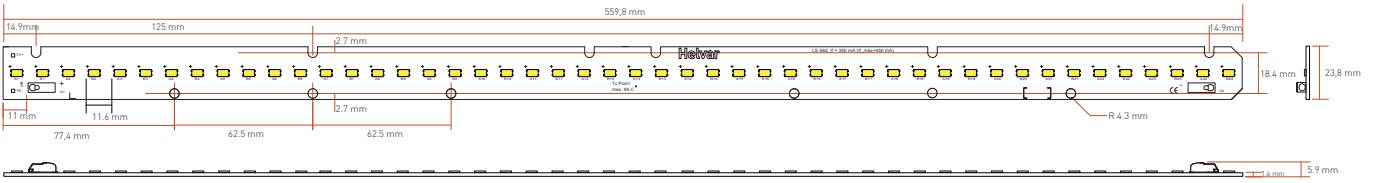

| | |
|------------------|----------|
| Length | 560.0 mm |
| Width | 24.0 mm |
| Thickness of PCB | 1.6 mm |
| Height | 5.9 mm |

| | | |
|-----------------|--------|-------|
| Packing details | 1 Tray | 1 Box |
| Num. of modules | 30 | 150 |


ESD foam trays, antistatic bag and carton box

Wiring specifications

| | |
|-------------------|--|
| Connector type | Push-in connector |
| Wire size | 0.2 - 0.75 mm ² , solid core 0.2 - 0.34 mm ² , stranded |
| Wire strip length | 7-9 mm |
| Wire type | solid core and fine-stranded |

Thermal Management

Tc (Tp) Point : See the below red mark.

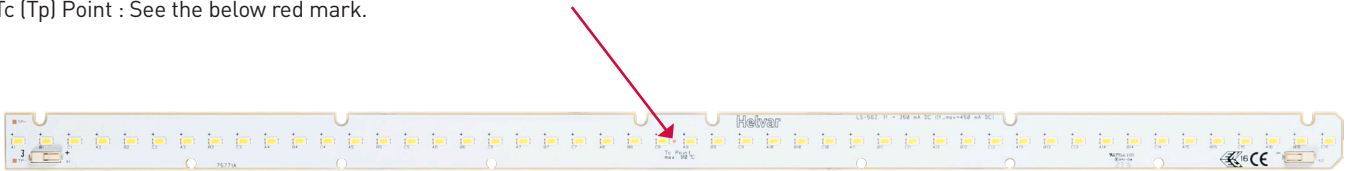


Connection



Following diagrams show examples how to connect multiple LED modules with Helvar Components LED drivers.

Non-isolated solution example

LS-562 module series connected with Helvar Components LL10-42-E-CC LED driver @ 350 mA

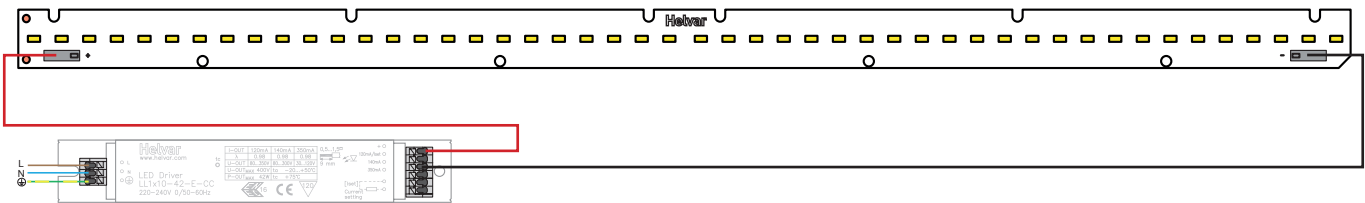


Specifications

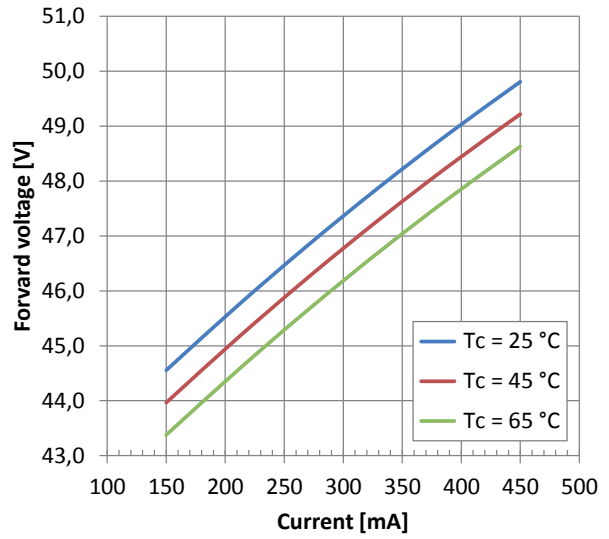
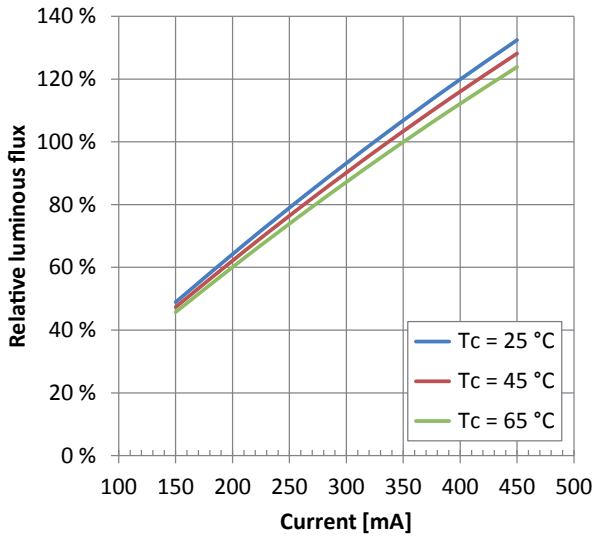


Photometric characteristics

3000 K

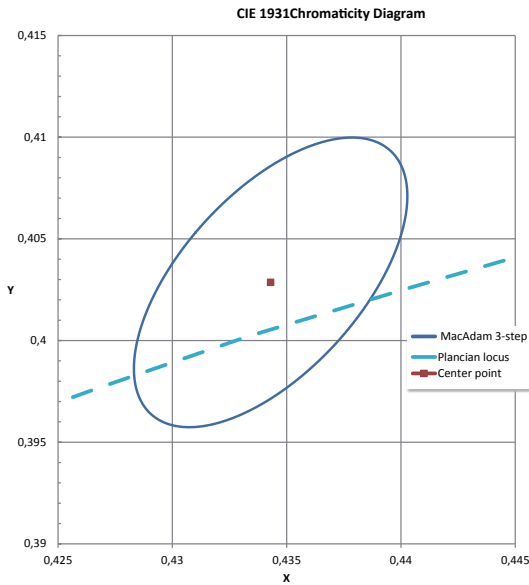

4000 K

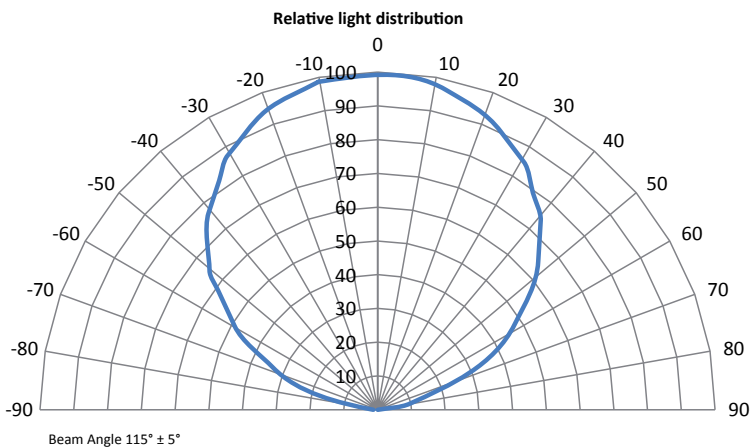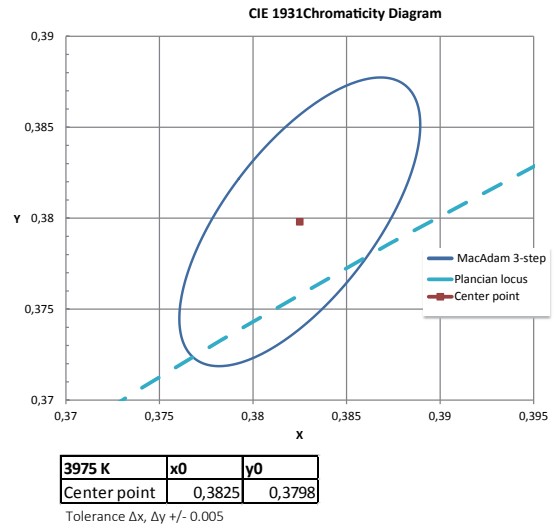

In order to have safe and reliable operation, the LED luminaires will need to comply with the relevant standards and regulations (e.g. IEC/EN 60598-1). The LED luminaire shall be designed to adequately protect the LED modules from dust, moisture and pollution. The luminaire manufacturer is responsible for the correct choice and installation of the LED module / LED driver combination according to the application and product datasheets. Specifications of the LED modules may never exceed the operating conditions as per the product datasheets.

HANDLING OF THE LED MODULES

LED modules contain components (LED packages, chips) that are sensitive for mechanical stress, electrostatic discharge (ESD) and chemical contaminants. Improper handling of the modules might cause damage or even destruction of the LED modules. Damaged LEDs may show some unusual characteristics such as increase in leakage current, lowered turn-on voltage, or abnormal lighting of LEDs at low current. Please follow following instructions and the precautions given in the product datasheets while handling and assembling Helvar Components LED modules.

Storage conditions

- Unused LED modules are recommended to stored carefully in an original sealed ESD package preventing moisture, pollutants or ESD to cause damage the module.
- Storage temperature range: -20...+80 °C

Opening the package / resealing

- LED modules are kept in stable protected environment in the packaging, open the package only when you are ready to use the LED modules. If resealing of the original package is required remove excess air from the packaging and place the moisture absorber (silica-gel bag) in to the packaging and seal the ESD back with adhesive tape.

ESD precautions at luminaire assembly site

The LEDs are sensitive to the electrostatic discharge (ESD) and surge current. If voltage exceeding the absolute maximum rating is applied to LEDs, it may cause damage or even destruction to LED devices.

- EN 61340-5-1: Protection of electronic devices from electrostatic phenomena – General Requirements describes procedures for protection for damage caused by electrostatic discharge while handling electronic devices, following list lists basic protective measures described in the standard.

ESD protection measures in handling and assembling LED modules

- Employee training for correct handling
- Personnel grounding via wrist band / footwear
- ESD protective clothing / shoes
- Handle LED modules only in ESD protected areas and workplaces

Chemical considerations

Chemical substances may cause damage the LED module by causing discoloration, loss of luminous flux or total failure of the module.

Avoid materials and substances containing:

- VOCs - Volatile Organic Compounds that may occur in adhesives, or sealings. Verify that the materials used in the luminaires are not causing VOCs.
- Halogen compounds
- Chlorine
- Acetates
- Sulphuric compounds

Never look directly into an operational LED module without suitable protective eye wear!

ELECTRIC & THERMAL CONSIDERATIONS

Wiring insulation

- According to recommendations in EN 60598

Wire connections

- Please refer to LED driver datasheets connections diagram
- Wrong polarity might damage the LED modules

Choosing the LED driver

- To guarantee the safe and reliable operation of the LS Series LED-modules the LED driver must be provided with open and short circuit protection.
- LS Series modules are designed to be used with constant current output type LED driver

Electrical design, electrical safety

During the design it is luminaire manufacturers responsibility to follow the international and national electric design regulations and recommendations for the electric safety and luminaire protection. Electric safety classification and protection class is depending on:

- Actual luminaire design and safety classification
 - LED driver insulation
 - LED driver output isolation (safety isolating, non-isolated)
- ALWAYS CHECK AND FOLLOW EXACT REGULATIONS FROM LATEST RELEVANT IEC/EN STANDARDS.

Installation considerations

The LS Series modules are basic isolated up to 400 V (when mounted with plastic screws or clips or with combination of M4 metal screws and insulating plastic washers) against ground and can be installed on earthed metal parts of the luminaire.

Please follow regulations from IEC60598-1 for creepage and clearance requirements. More information on LS Series installation guide ref 0220201A.

Maximum tc & tp temperature

- Reliable operation is only guaranteed if the maximum Tc point temperature is not exceeded under the conditions of use.
- Lifetime is only guaranteed if the maximum tp point temperature specified for lifetime is not exceeded under the conditions of use.

MECHANICAL CONSIDERATIONS

- While handling the modules avoid mechanical stress or pressure applied to light emitting surface.
- Avoid dropping of the LED modules
- Bending of the modules is not allowed
- Avoid touching the light emitting surface
- Mechanical modifications (drilling, milling, sawing and breaking of the module) are not permitted

Conformity & standards

| | |
|--|-------------------------------------|
| Led modules for general lighting - safety specifications | IEC / EN 62031 |
| Photobiological safety of lamps and lamp systems | IEC / EN 62471 TR IEC / EN 62778 |
| Compliant with relevant EU directives | |
| CE marked | |
| RoHS / REACH compliant | |

All data were deemed correct at time of creation. Helvar Components is not liable for errors or omissions.

Compatible LEDiL optics

Following LEDiL optics are compatible with LS-562A LED module. More information about LEDiL optics is available at www.LEDiL.com.

| |
|---------------------|
| F15523_LINNEA-90 |
| F15524_LINNEA-60 |
| F15756_LINNEA-0 |
| F15860_LINNEA-Z2T25 |
| F15861_LINNEA-ZT25 |
| F16048_LINNEA-UP |